

# MAVIC Cosmic Pro Carbon

ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

Max. Pressure: 25mm 7.7 bars - 110 PSI

## 参照ホイール

F71861	Cos Pro Car 17 Ft Custom	F54202	Cos Pro Carb 17 Ft White
F54201	Cos Pro Carb 17 Ft Black		

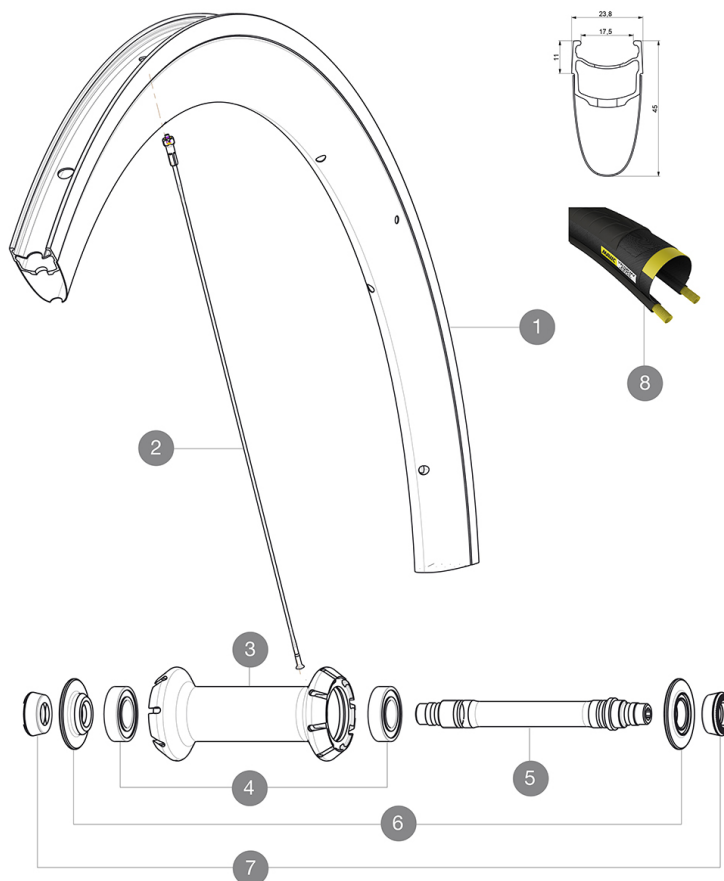

## RIMS



&NBSP;:

1	LV4091800	KIT FRONT RIM COSMIC PRO CARBON U shaped
1	LV2407500	KIT FRONT RIM COSMIC PRO CARBON UB WHITE - while stock last
1	LV2407300	KIT FRONT RIM COSMIC PRO CARBON UB GRAPHITE - while stock la

## SPOKES

2	LV3663400	KIT 12 FRT BUTTED AERO STAINLESS SPOKE 287 + alu nipple + wa
2	LV2274500	KIT 8 FRT BUTTED AERO SPOKE 287mm/ALU NIPPLE - while stock I

## HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	L30870000	FRONT AXLE ROAD RIM BRAKING QRM +
6	V2252501	FRONT SETTING NUT & DUST PROTECTOR MY16
7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013

## TYRES

8	L37805300	Yksion Pro GripLink White 25
---	-----------	------------------------------



# Cosmic Pro Carbon

## 付属品

BR301 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
BR301 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
BR301 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
Rim tape	
Rim tape	
Rim tape	
Multifunction adjustment wrench (325 423 01) 1	
Multifunction adjustment wrench (325 423 01) 1	
Multifunction adjustment wrench (325 423 01) 1	
User guide	
User guide	
User guide	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: Quick Release only	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	

## Specifications

- リム**
- Material : Maxtal and 12K carbon fiber
  - Material : Maxtal and 12K carbon fiber
  - Material : Maxtal and 12K carbon fiber
  - Height : 45 mm
  - Height : 45 mm
  - Height : 45 mm
  - Joint : SUP
  - Joint : SUP
  - Joint : SUP
  - Drilling : traditional
  - Drilling : traditional
  - Drilling : traditional
  - Brake track : UB Control
  - Brake track : UB Control
  - Brake track : UB Control
  - Weight reduction : ISM
  - Weight reduction : ISM
  - Weight reduction : ISM
  - Valve hole diameter : 6.5 mm
  - Valve hole diameter : 6.5 mm
  - Valve hole diameter : 6.5 mm
  - Tyre : clincher
  - Tyre : clincher
  - Tyre : clincher
  - Internal width : 17 mm
  - Internal width : 17 mm
  - Internal width : 17 mm
  - ETRTO size : 622x17C

- ホイールハブ**
- Front and rear bodies : aluminum
  - Front and rear bodies : aluminum
  - Front and rear bodies : aluminum
  - Axle material : aluminum
  - Axle material : aluminum
  - Axle material : aluminum
- ~~~~~QRM+~~~~~  
 ~~~~~QRM Auto~~~~~  
 ~~~~~QRM+~~~~~  
 ~~~~~QRM Auto~~~~~
- Sealed cartridge bearings
- Freewheel : Instant Drive 360
  - Freewheel : Instant Drive 360
  - Freewheel : Instant Drive 360
- VERSIONS**
- Color : Black only
  - Color : Black only

- ホイールの重み**
- ホイール重量 ( クイックリリー  
スおよびクリンチャー/チュー  
ブラーを除く ) ( g ) : 755