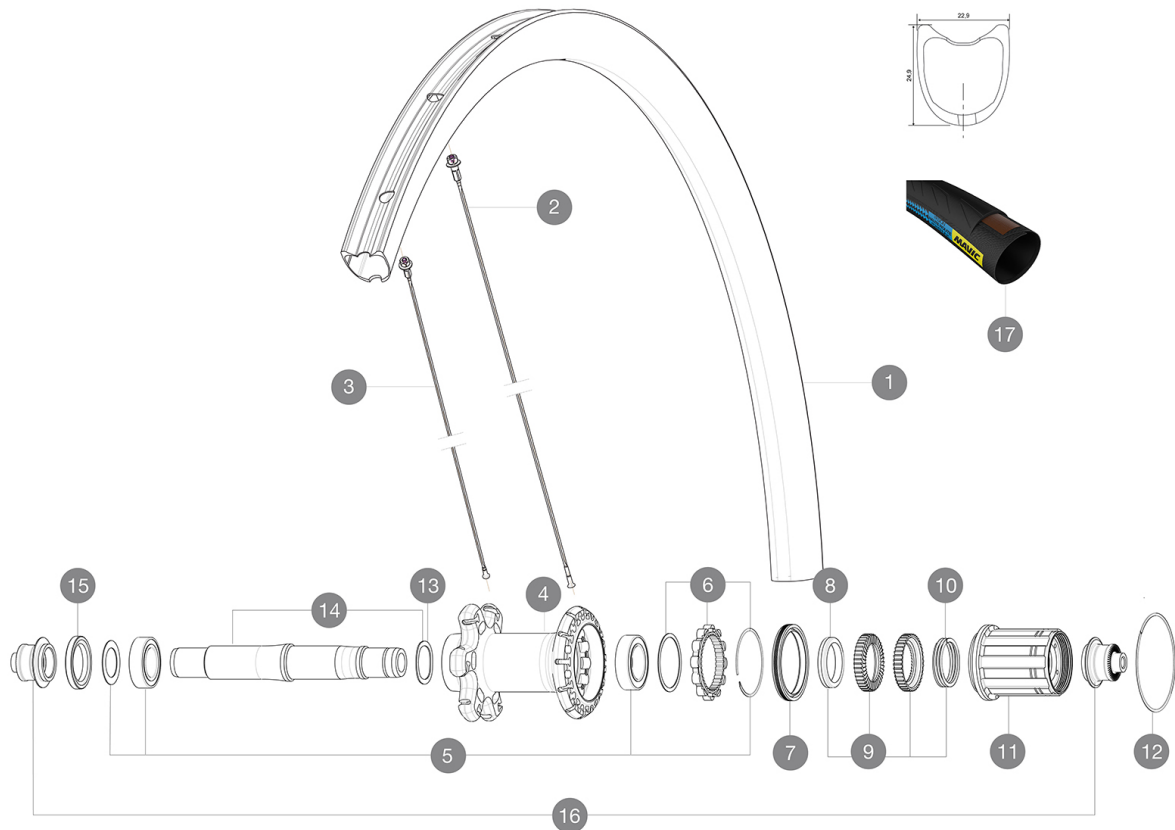


# MAVIC Ksyrium Pro Carbon SL T HR

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 25 to 32 mm  
 Max. Pressure: 25mm 7.7 bars - 110 PSI

## REFERENCES WHEELS

R98341 KsyProCarbSLT HR Rr SV



## RIMS



VALVE HOLE Ø (MM): 6,5 :

1 LV2730200 KIT REAR RIM KSYRIUM PRO CARBON SL TUB HR

## SPOKES

2 LV227150001 KIT 12 FT KSY PRO CARB SL D/NDS KSY PRO CARB SL SPK 291mm -  
 2 LV3663300 KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB SL  
 3 LV3663200 KIT 12 DS KSY PRO CARB SL UST/UST Disc/C Disc/T Disc BUTTED  
 3 LV227140001 KIT 12 DS KSYRIUM PRO CARB SL T SPOKE 273mm - while stock la  
 3 LV2273100 KIT 1 FT 285/1 FT 291/1 DS 273 KSY PRO CARB SL C/D/T HR SPK

## HUB SHELLS

4 N/A HUB BODY  
 5 LV2560100 KIT ID360 BEARINGS 15/26/7 + 17/28/7  
 5 LV2540300 KIT REAR BEARINGS 17x28x7 + 15x26x7 CERAMIC - while stock la  
 6 LV2252700 KIT ID360 INSERT SHAPED EAR LOBE > 2017  
 7 LV2251600 KIT ID360 SEAL + GREASE  
 8 LV2500500 KIT ID360 3 PADS NOISE REDUCING  
 9 LV2251700 KIT ID360 2 RATCHETS + SPRING + GREASE  
 10 LV2251800 KIT 3 ID360 ROAD SPRINGS  
 11 LV3430100 HG11 Freewheel Body ID360  
 12 LV2252200 KIT 2 REAR HUB RETENTION RINGS 48mm  
 13 LV2251500 KIT 3 ID360 WAVE WASHERS  
 14 LV2251200 KIT ID360 AXLE UB  
 15 LV2251000 KIT ID360 HUB THREADED CAP UB+DISC 6 BOLTS (large)





16 LB4989400 ADAPTER Rr 9mm QR ID360 (6bolt)

## TYRES

17 L39435800 YksionProPowerLink HRTubular

# MAVIC Ksyrium Pro Carbon SL T HR

## DELIVERED WITH

BR601 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
Carbon brake pads (V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) 1 pair	
Multifunction adjustment wrench (325 423 01) 1	
"Haute Route" special edition wheelbags 1	
User guide	

## COMPATIBILITY

Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
Front axle: Quick Release only	
Rear axle: Quick Release only	

## Specifications

### RIMS

- **Material** : 3K carbon fibers
- **Height** : 25mm
- **Drilling** : traditional
- **Brake track** : carbon with TgMAX technology
- **Brake track** : carbon
- **Valve hole diameter** : 6.5 mm
- **Tire** : tubular
- **ETRTO size** : 28" tubular

### SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : aluminum, ABS
- **Count** : front 18, rear 24
- **Lacing** : front radial, rear Isopulse

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- High quality ceramic bearings by CeramicSpeed (R)
- **Freewheel** : Instant Drive 360

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

Wheel weight 675