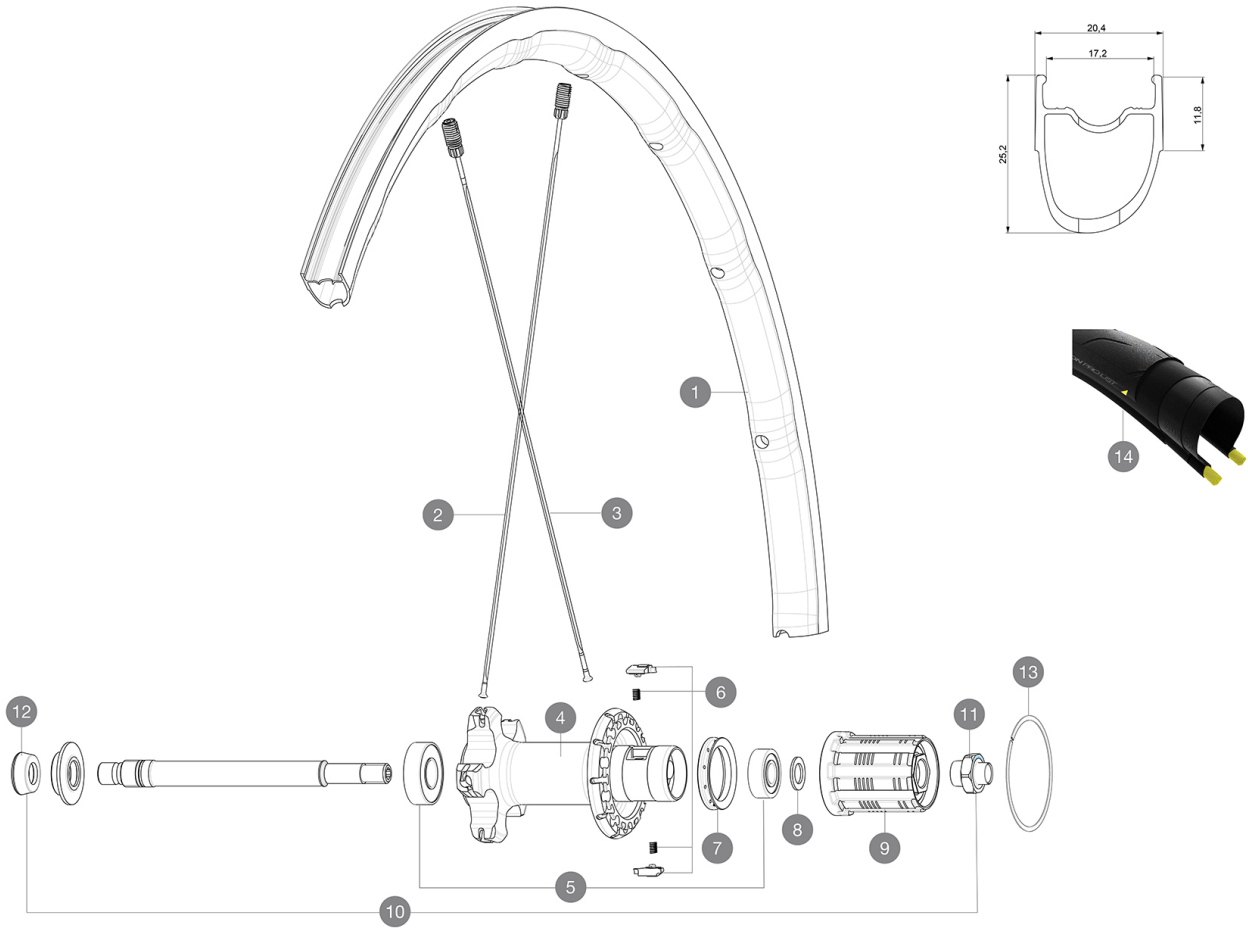# MAVIC · *Aksium Elite UST*

ASTM CATEGORY 1 : road only
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
Recommended tyre sizes: 25 to 32 mm
Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the 2

## *REFERENCES WHEELS*

| R34211 | AksiumElite Evo UST 20 Rr |
|---|---|



## RIMS

&NBSP;:

| 1 | LV2739900 | KIT FRONT/REAR RIM AKSIUM ELITE UST 19/20 |
|---|---|---|
|   | LV3720100 | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

| 2 | LV3664700 | KIT 10 FRT/NDS AKSIUM ELITE UST FLAT SPOKE 282mm + nipple |
|---|---|---|
| 3 | LV3664800 | KIT 10 DS AKSIUM ELITE UST/KSYRIUM UST FLAT BUTTED SPOKE 297 |

## HUB SHELLS

| 4 | N/A | HUB BODY |
|---|---|---|
| 5 | LM4066000 | REAR HUB 608+6001 BEARINGS |
| 6 | LM4057800 | FTSL PAWLS KIT (ROAD WHEELS) |
| 7 | L99500000 | FTSL/FTSX FREEHUB BODY SEAL |
| 8 | L30872800 | SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L |
| 9 | L30871100 | FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible |
| 10 | L99603900 | REAR AXLE QRM ROAD 2008 |
| 11 | L99603800 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |
| 12 | L12034400 | KIT 3 HUB CAPS AERO 10 SLOTS BLACK |

# MAVIC *Aksium Elite UST*

## DELIVERED WITH

| | |
|---|---|
| Mavic tyre sealant (rear wheel) (355 466 01) | |
| Tyre sealant syringe | |
| BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) | |
| UST valve and accessories (129 838 01) | |
| Tubeless rim tape | |
| User guide | |

## COMPATIBILITY

| | |
|---|---|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body | |
| Front axle: Quick Release only | |
| Rear axle: Quick Release only | |

## Specifications

### RIMS

- **Material :** S6000 Aluminum
- **Height :** 25mm
- **Joint :** SUP
- **Drilling :** traditional
- **Brake track :** UB Control
- **Valve hole diameter :** 6.5 mm
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 19 mm
- **ETRTO size :** 622x19TC Road

Use with Mavic Tubeless Tape

### SPOKES

- **Material :** steel
- **Shape :** straight pull, flat, double butted
- **Nipples :** steel, ABS
- **Count :** 20 front and rear
- **Lacing :** radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** steel

Sealed cartridge bearings (QRM)

- **Freewheel :** FTS-L steel

### VERSIONS

- **Color :** Black only

### WHEEL WEIGHTS

955