


ASTM CATEGORY 1 : road only
Recommended weight limit : 120kg

REFERENCES WHEELS

R57301 CosmicUlti16Rr

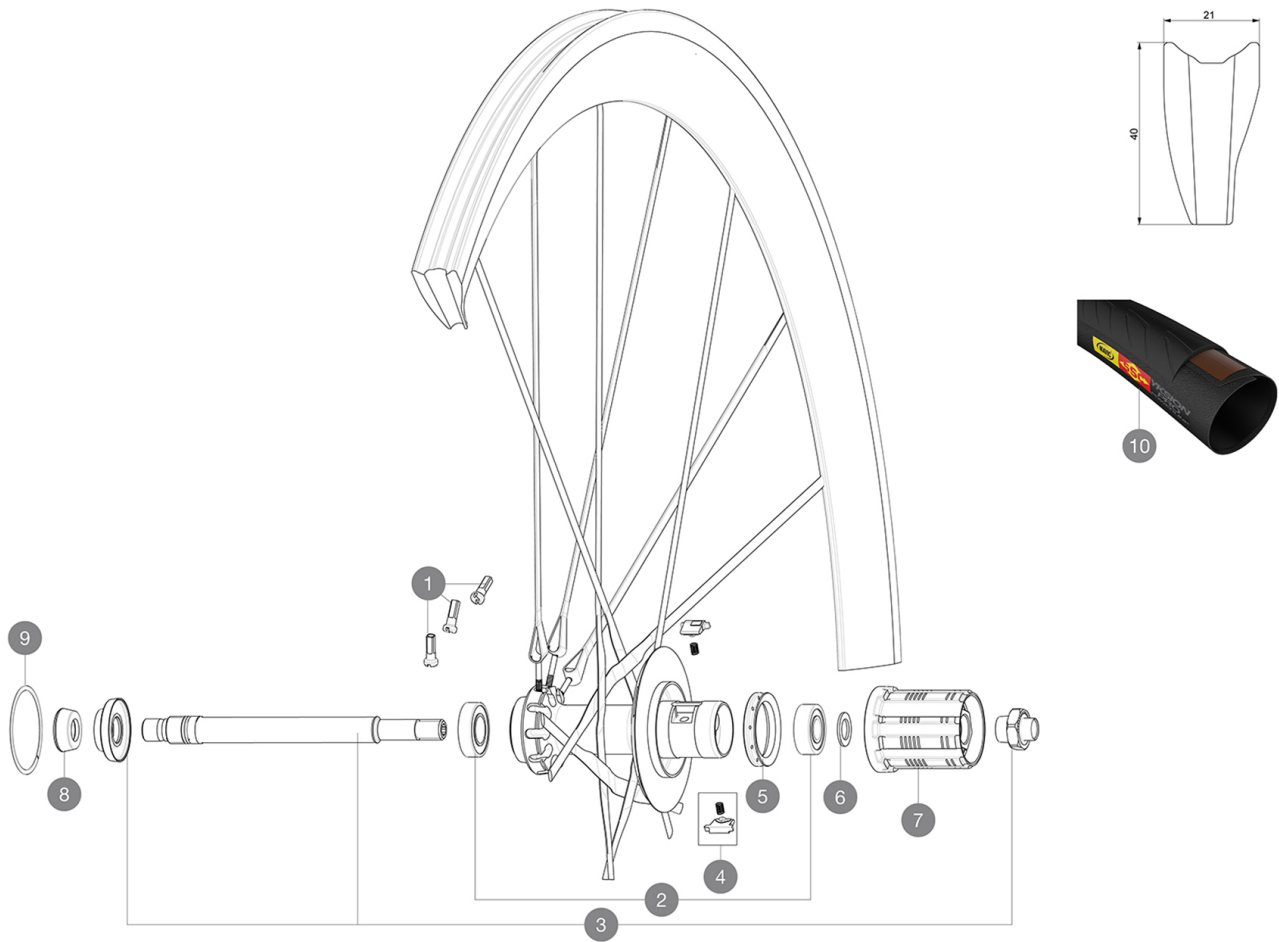

SPOKES

1 L99603600 KIT 10 NIPPLES COSMIC CARBON ULTIMATE

HUB SHELLS

2 L33000000 REAR HUB B9+6901 BEARINGS 2013
 3 LV2250800 KIT REAR AXLE COSMIC ULTIMATE
 4 LM4057800 FTSL PAWLS KIT (ROAD WHEELS)
 5 L99500000 FTSL/FTSX FREEHUB BODY SEAL
 6 L30872800 SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L
 7 L30871100 FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible
 7 L30871200 FTS-L ROAD FREEWHEEL BODY ED11 8/9 compatible
 8 L35117300 FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T
 9 L99604500 SET OF 2 R.HUB RING COS.CARB.ULTIMATE

TYRES

10 L37804600 Yksion ProPowerTub SSC

MAVIC *Cosmic Ultimate T***DELIVERED WITH**

BR601 Titanium quick releases	
Carbon brake pads	
Multifonction adjustment wrench	
User guide	

Specifications**RIMS**

- **Material** : 100% woven 12K carbon fiber
- **Height** : 40 mm
- **Drilling** : no holes, spokes molded to the rim
- **Brake track** : carbon with TgMAX technology
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **ETRTO size** : 28" tubular
- **Recommended tyre sizes** : 21 to 28 mm

SPOKES

- **Material** : unidirectional carbon fiber
- **Shape** : R2R
- **Nipples** : brass, ABS
- **Count** : 20 front and rear
- **Lacing** : crossed 2 front and rear drive side, radial non drive side

WHEEL HUB

- **Front body** : Front 100% carbon
 - **Rear body** : aluminum
 - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS

Wheel weight 665